


1SS88

SCHOTTKY BARRIER DIODE

DO - 35 Glass (DO-204AH)

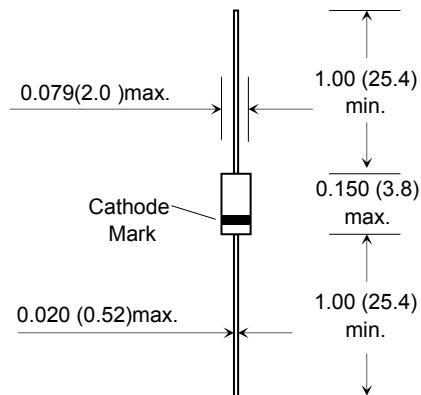

Dimensions in inches and (millimeters)

MECHANICAL DATA :

Case: DO-35 Glass Case

Weight: approx. 0.13g

Maximum Ratings and Thermal Characteristics (Rating at 25 °C ambient temperature unless otherwise specified.)

Parameter	Symbol	Value	Unit
Reverse Voltage	V_R	10	V
Average Rectified Current	I_o	15	mA
Peak Forward Current	I_{FM}	35	mA
Junction Temperature	T_J	125	°C
Storage temperature range	T_{stg}	-55 to + 125	°C


Note: (1) Valid provided that leads at a distance of 4mm from case are kept at ambient temperature.

Electrical Characteristics ($T_J = 25^\circ\text{C}$ unless otherwise noted)


Parameter	Symbol	Test Condition	Min	Typ	Max	Unit
Reverse Current	I_R	$V_R = 10 \text{ V}$	-	-	10	μA
		$V_R = 2 \text{ V}$	-	-	0.2	μA
Forward Voltage	V_F	$I_F = 1 \text{ mA}$	-	-	430	mV
		$I_F = 10 \text{ mA}$	-	-	600	mV
Diode Capacitance	C_d	$V_R = 0\text{V}, f = 1\text{MHz}$	-	-	0.97	pF
Diode Capacitance Deviation	ΔC_d	$V_R = 0\text{V}, f = 1\text{MHz}$	-	-	± 0.05	pF
Forward Voltage Deviation	ΔV_F	$I_F = 10 \text{ mA}$	-	-	± 5	mV

RATING AND CHARACTERISTIC CURVES (1SS88)

Forward Current vs. Forward Voltage

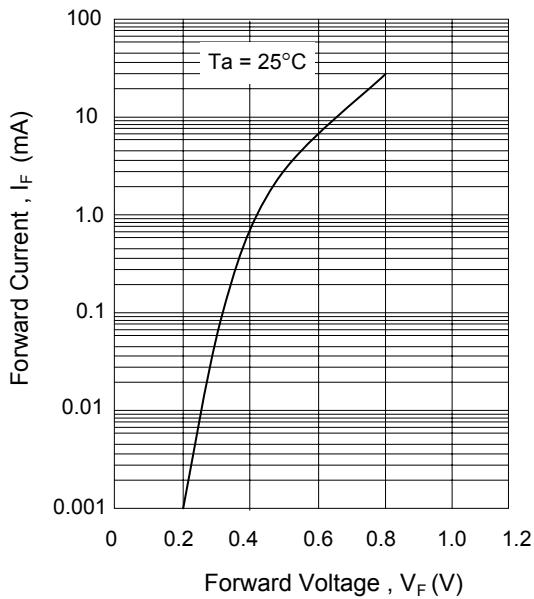

Reverse Current vs. Reverse Voltage

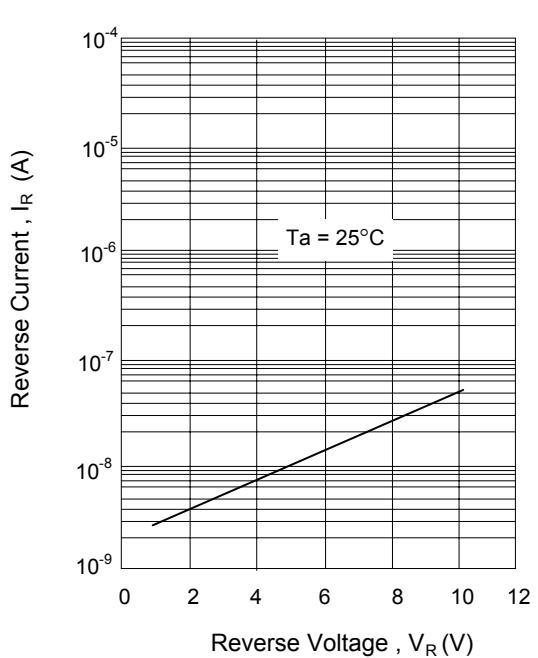

Diode capacitance vs. Reverse Voltage

