

## AKBL400 - AKBL410

**PRV : 50 - 1000 Volts**

**Io : 4.0 Amperes**


### FEATURES :

- \* High case dielectric strength
- \* High surge current capability
- \* High reliability
- \* Low reverse current
- \* Low forward voltage drop
- \* Ideal for printed circuit board
- \* **Pb / RoHS Free**

### MECHANICAL DATA :

- \* Case : Reliable low cost construction utilizing molded plastic technique
- \* Epoxy : UL94V-O rate flame retardant
- \* Lead : Axial lead solderable per MIL - STD 202 , Method 208 guaranteed
- \* Polarity : Polarity symbols marked on case
- \* Mounting position : Any
- \* Weight : 5.15 grams

## AVALANCHE BRIDGE RECTIFIERS

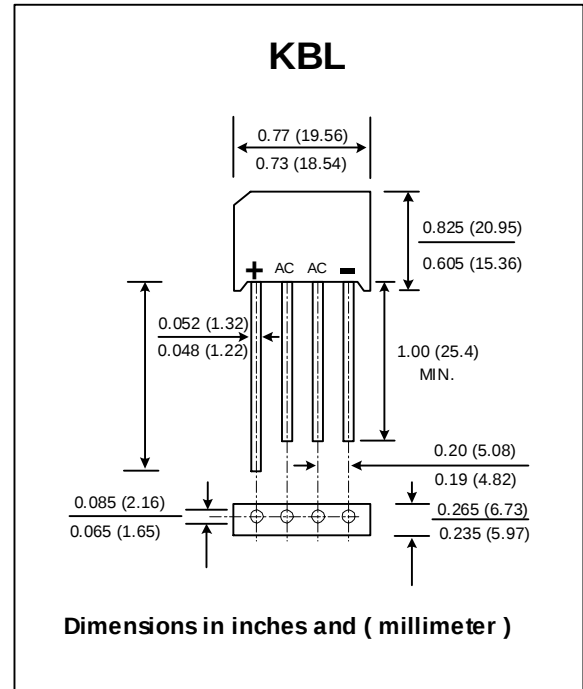

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25 °C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%.


| RATING                                                                                                        | SYMBOL          | AKBL<br>400   | AKBL<br>401 | AKBL<br>402 | AKBL<br>404 | AKBL<br>406 | AKBL<br>408 | AKBL<br>410 | UNIT               |
|---------------------------------------------------------------------------------------------------------------|-----------------|---------------|-------------|-------------|-------------|-------------|-------------|-------------|--------------------|
| Maximum Recurrent Peak Reverse Voltage                                                                        | $V_{RRM}$       | 50            | 100         | 200         | 400         | 600         | 800         | 1000        | V                  |
| Maximum RMS Voltage                                                                                           | $V_{RMS}$       | 35            | 70          | 140         | 280         | 420         | 560         | 700         | V                  |
| Maximum DC Blocking Voltage                                                                                   | $V_{DC}$        | 50            | 100         | 200         | 400         | 600         | 800         | 1000        | V                  |
| Minimum Avalanche Breakdown Voltage at 100 $\mu$ A                                                            | $V_{BO(min.)}$  | 100           | 150         | 250         | 450         | 700         | 900         | 1100        | V                  |
| Maximum Avalanche Breakdown Voltage at 100 $\mu$ A                                                            | $V_{BO(max.)}$  | 550           | 600         | 700         | 900         | 1150        | 1350        | 1550        | V                  |
| Maximum Average Forward Current $T_c = 50^\circ\text{C}$                                                      | $I_{F(AV)}$     | 4.0           |             |             |             |             |             |             | A                  |
| Peak Forward Surge Current Single half sine wave Superimposed on rated load (JEDEC Method)                    | $I_{FSM}$       | 200           |             |             |             |             |             |             | A                  |
| Rating for fusing at ( $t < 8.3$ ms. )                                                                        | $I^2t$          | 166           |             |             |             |             |             |             | A <sup>2</sup> S   |
| Maximum Forward Voltage per Diode at $I_F = 4.0$ A                                                            | $V_F$           | 1.1           |             |             |             |             |             |             | V                  |
| Maximum DC Reverse Current $T_a = 25^\circ\text{C}$<br>at Rated DC Blocking Voltage $T_a = 100^\circ\text{C}$ | $I_R$           | 10            |             |             |             |             |             |             | $\mu$ A            |
|                                                                                                               | $I_{R(H)}$      | 1.0           |             |             |             |             |             |             | mA                 |
| Typical Thermal Resistance (Note1)                                                                            | $R_{\theta JA}$ | 10            |             |             |             |             |             |             | $^\circ\text{C/W}$ |
| Operating Junction Temperature Range                                                                          | $T_J$           | - 50 to + 150 |             |             |             |             |             |             | $^\circ\text{C}$   |
| Storage Temperature Range                                                                                     | $T_{STG}$       | - 50 to + 150 |             |             |             |             |             |             | $^\circ\text{C}$   |

### Note :


1) Thermal resistance from Junction to ambient with units mounted on a 3" x 3" x 0.11" ( 7.5 x 7.5 x 0.3 cm ) Cu. plate.

## RATING AND CHARACTERISTIC CURVES ( AKBL400 - AKBL410)


**FIG.1 - DERATING CURVE FOR OUTPUT RECTIFIED CURRENT**

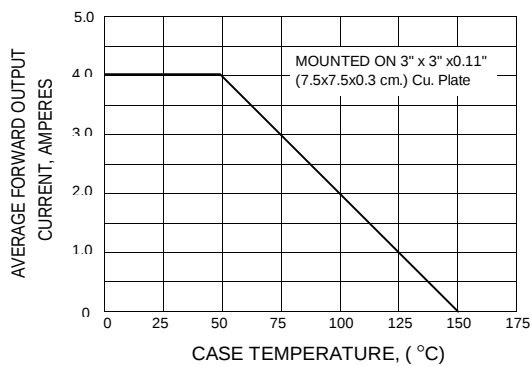

**FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT**

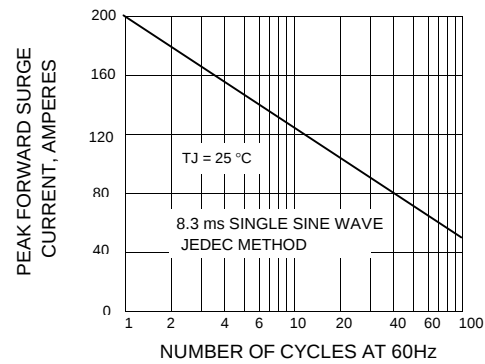

**FIG.3 - TYPICAL FORWARD CHARACTERISTICS PER DIODE**

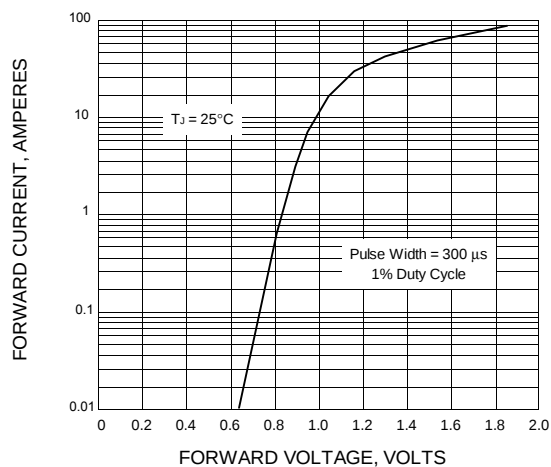

**FIG.4 - TYPICAL REVERSE CHARACTERISTICS**

