

# AKBP200 - AKBP210

# AVALANCHE BRIDGE RECTIFIERS

**PRV : 50 - 1000 Volts**


**Io : 2.0 Amperes**

**FEATURES :**

- \* High case dielectric strength
- \* High surge current capability
- \* High reliability
- \* Low reverse current
- \* Low forward voltage drop
- \* Ideal for printed circuit board
- \* Pb / RoHS Free

**MECHANICAL DATA :**

- \* Case : Reliable low cost construction utilizing molded plastic technique
- \* Epoxy : UL94V-O rate flame retardant
- \* Lead : Axial lead solderable per MIL - STD 202 , Method 208 guaranteed
- \* Polarity : Polarity symbols marked on case
- \* Mounting position : Any
- \* Weight : 3.4 grams

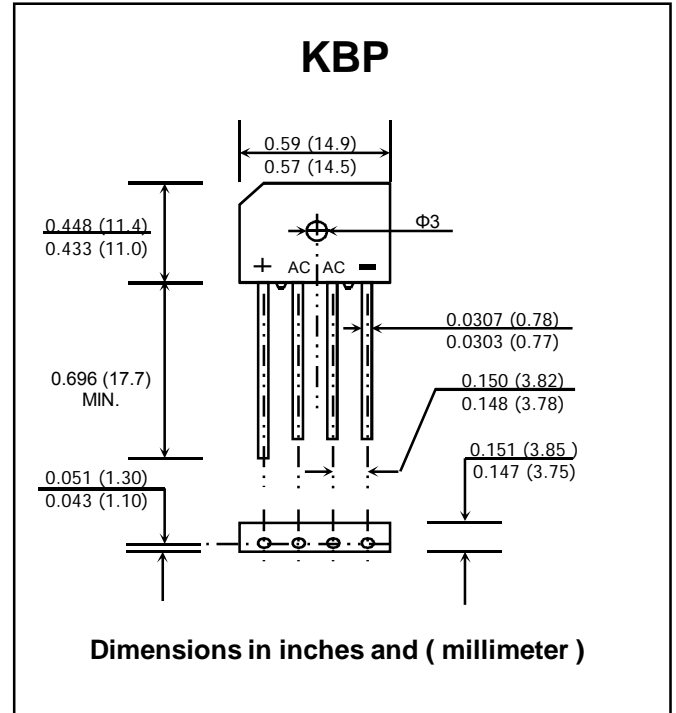

**MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS**

Rating at 25 °C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

RATING	SYMBOL	AKBP 200	AKBP 201	AKBP 202	AKBP 204	AKBP 206	AKBP 208	AKBP 210	UNIT
Maximum Recurrent Peak Reverse Voltage	V <sub>RRM</sub>	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V <sub>RMS</sub>	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V <sub>DC</sub>	50	100	200	400	600	800	1000	V
Minimum Avalanche Breakdown Voltage at 100 μA	V <sub>BO(min.)</sub>	100	150	250	450	700	900	1100	V
Maximum Avalanche Breakdown Voltage at 100 μA	V <sub>BO(max.)</sub>	550	600	700	900	1150	1350	1550	V
Maximum Average Forward Current T <sub>c</sub> = 50°C	I <sub>F(AV)</sub>	2.0							A
Peak Forward Surge Current Single half sine wave Superimposed on rated load (JEDEC Method)	I <sub>FSM</sub>	50							A
Rating for fusing at ( t < 8.3 ms. )	I <sup>2</sup> t	10							A <sup>2</sup> S
Maximum Forward Voltage per Diode at I <sub>F</sub> = 1.0 A	V <sub>F</sub>	1.0							V
Maximum DC Reverse Current Ta = 25 °C at Rated DC Blocking Voltage Ta = 100 °C	I <sub>R</sub>	10							μA
	I <sub>R(H)</sub>	1.0							mA
Typical Thermal Resistance (Note1)	RθJA	36							°C/W
Operating Junction Temperature Range	T <sub>J</sub>	- 50 to + 150							°C
Storage Temperature Range	T <sub>STG</sub>	- 50 to + 150							°C


**Notes :**

1 ) Thermal resistance from Junction to ambient with units mounted on a 3" x 3" x 0.11" ( 7.5 x 7.5 x 0.3 cm ) Cu. plate.




### RATING AND CHARACTERISTIC CURVES ( AKBP200 - AKBP210 )


**FIG.1 - DERATING CURVE FOR OUTPUT RECTIFIED CURRENT**

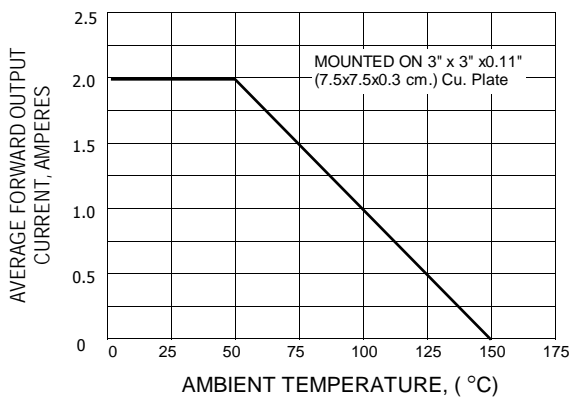

**FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT**

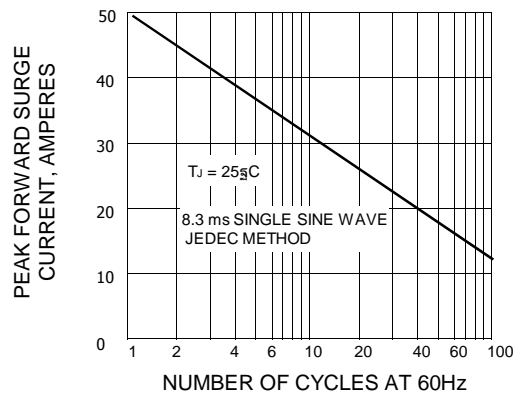

**FIG.3 - TYPICAL FORWARD CHARACTERISTICS PER DIODE**

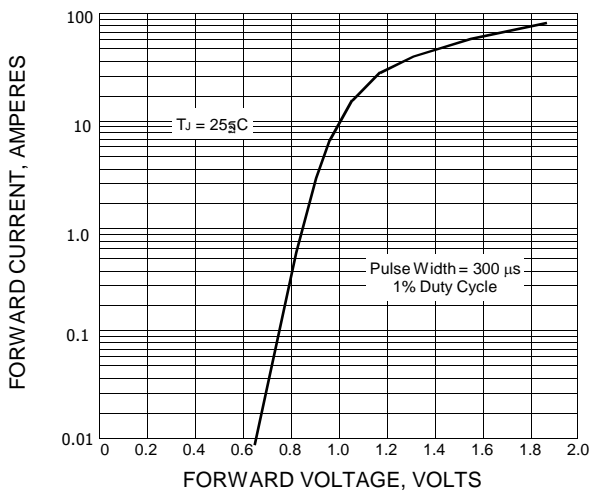

**FIG.4 - TYPICAL REVERSE CHARACTERISTICS**

