

EM1 ~ EM1A

PRV : 400 ~ 600 Volts

Io : 1.0 Ampere

FEATURES :


- * High current capability
- * High surge current capability
- * High reliability
- * Low reverse current
- * Low forward voltage drop
- * **Pb / RoHS Free**

MECHANICAL DATA :

- * Case : DO-41 Molded plastic
- * Epoxy : UL94V-O rate flame retardant
- * Lead : Axial lead solderable per MIL-STD-202, Method 208 guaranteed
- * Polarity : Color band denotes cathode end
- * Mounting position : Any
- * Weight : 0.339 gram

SILICON RECTIFIER DIODES

DO - 41

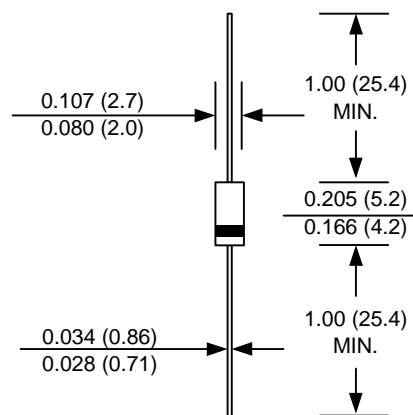

Dimensions in inches and (millimeters)

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25 °C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

RATING	SYMBOL	EM1	EM1A	UNIT
Maximum Peak Reverse Voltage	V _{RM}	400	600	V
Maximum Peak Reverse Surge Voltage	V _{RSM}	450	650	V
Maximum Reverse Voltage	V _R	400	600	V
Maximum Average Forward Current	I _{F(AV)}	1.0		A
Maximum Peak Forward Surge Current (50 Hz, Half-cycle, Sine Wave, Single Shot)	I _{FSM}	45		A
Maximum Forward Voltage at I _F = 1.0 A	V _F	0.97		V
Maximum Reverse Current at Reverse Voltage Ta = 25 °C	I _R	10		μA
Maximum Reverse Current at Reverse Voltage Ta = 100 °C	I _{R(H)}	50		μA
Junction Temperature Range	T _J	- 40 to + 150		°C
Storage Temperature Range	T _{STG}	- 40 to + 150		°C

RATING AND CHARACTERISTIC CURVES (EM1 ~ EM1A)

FIG.1 - DERATING CURVE FOR OUTPUT RECTIFIED CURRENT

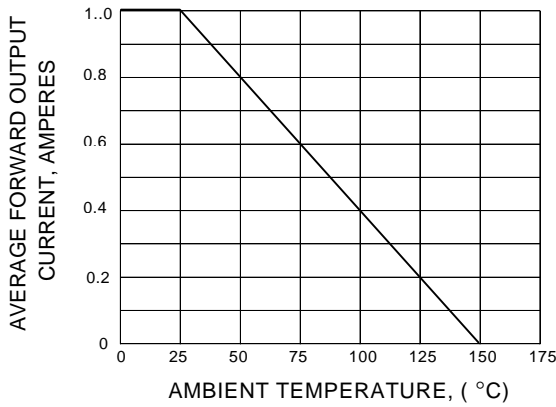


FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

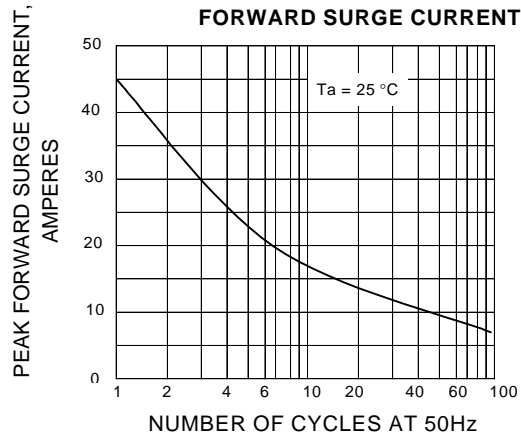


FIG.3 - TYPICAL FORWARD CHARACTERISTICS

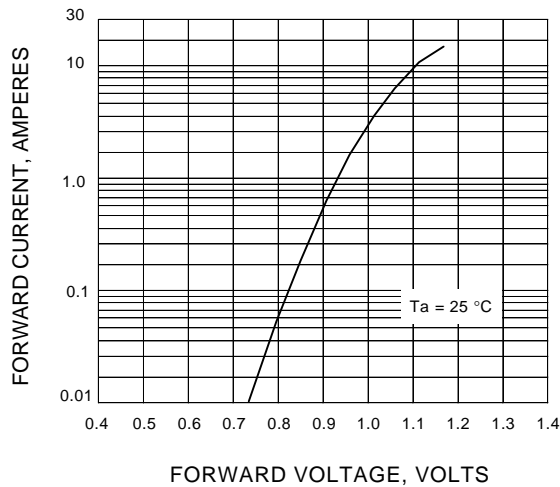


FIG.4 - TYPICAL REVERSE CHARACTERISTICS

