

# MUR1620CTR

**PRV : 200 Volts**  
**Io : 8.0 Ampere**

## FEATURES :


- \* High current capability
- \* High surge current capability
- \* High reliability
- \* Low reverse current
- \* Low forward voltage drop
- \* Pb / RoHS Free

## MECHANICAL DATA :

- \* Case : Epoxy, Molded
- \* Lead Temperature for Soldering Purposes:  
 260°C Max. for 10 Seconds
- \* Weight : 2.1 grams (Approximately)

# ULTRAFAST RECTIFIER

## TO-220AB

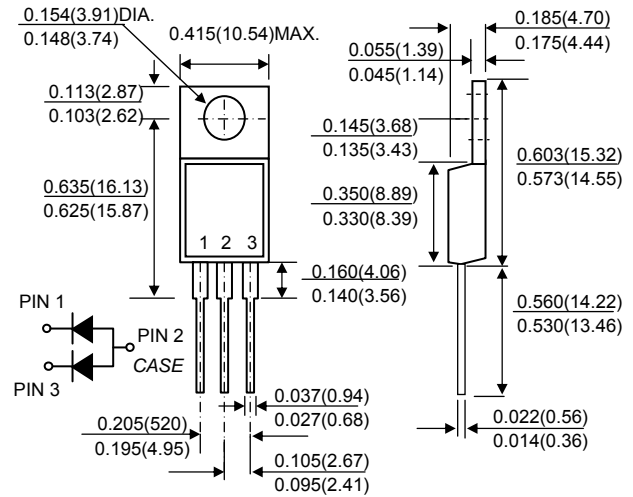

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25 °C ambient temperature unless otherwise specified.

RATING	SYMBOL	VALUE	UNIT
Maximum Repetitive Peak Reverse Voltage	VRRM	200	V
Maximum Working Reverse Voltage	VRWM	200	V
Maximum DC Blocking Voltage	VDC	200	V
Maximum Average Forward Current	IF(AV)	8.0 (Per Leg )	A
Total Device,(Rated VR), Tc = 150°C		16 (Total Device)	
Maximum Peak Rectified Forward Current (Rated VR, Square Wave, 20 kHz) Tc = 150°C	IFRM	16	A
Maximum Non-repetitive Peak Forward Surge Current (Halfwave, single phase, 60 Hz) Per Leg	IFSM	100	A
Maximum Forward Voltage at IF = 8 A, Tc = 25°C	VF	1.2 <sup>(1)</sup>	V
Maximum Instantaneous Reverse Current <sup>(1)</sup> ( Rated dc Voltage)	IR	5 (Tc = 25°C)	μA
	IR(H)	500 (Tc = 150°C)	μA
Maximum Reverse Recovery Time (IF = 0.5A, IR = 1A ; Irr = 0.25 A)	Trr	35	ns
Maximum Thermal Resistance, Junction to Case	RθJC	2.0	°C/W
Junction Temperature Range	TJ	- 65 to + 175	°C
Storage Temperature Range	TSTG	- 65 to + 175	°C

### Note :

(1) Pulse Test : Pulse Width = 300 μs, Duty Cycle ≤ 2.0%

## RATING AND CHARACTERISTIC CURVES ( MUR1620CTR )

FIG.1 - REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

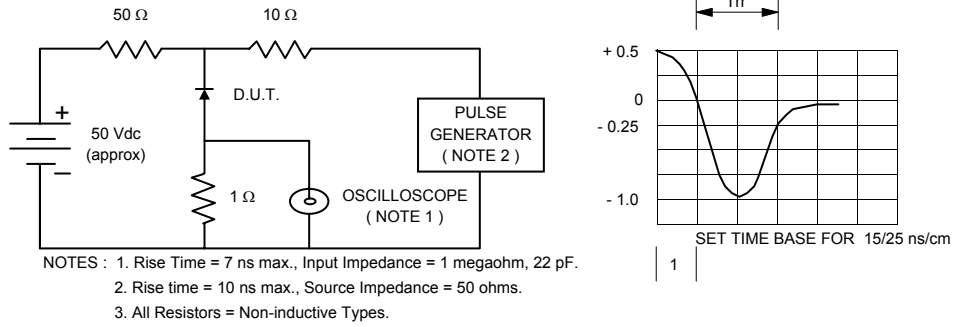


FIG. 2 - CURRENT DERATING CASE, PER LEG

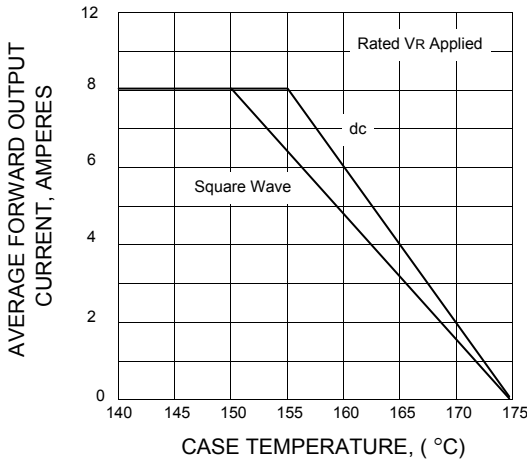


FIG. 3 - POWER DISSIPATION, PER LEG

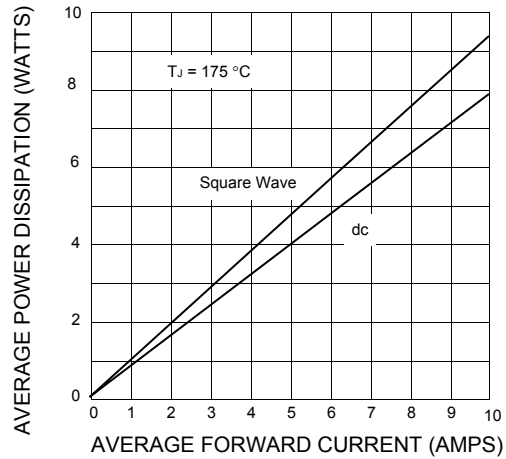


FIG. 4 - TYPICAL FORWARD VOLTAGE, PER LEG

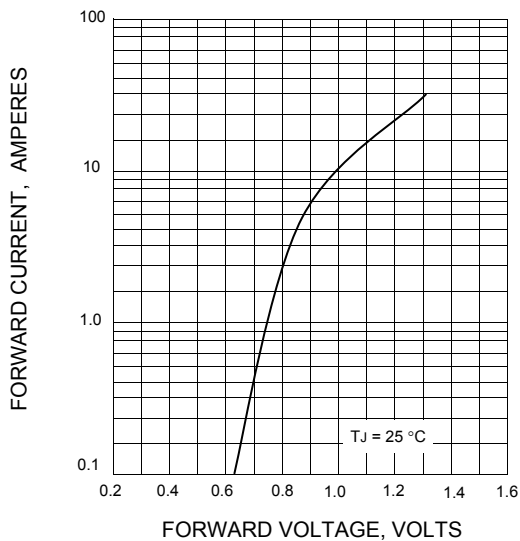


FIG. 5 - TYPICAL REVERSE CURRENT, PER LEG

