

# GN2A - GN2M

**PRV : 50 - 1000 Volts**  
**Io : 2.0 Amperes**


**FEATURES :**

- \* Glass passivated chip
- \* High current capability
- \* High reliability
- \* Low reverse current
- \* Low forward voltage drop
- \* **Pb / RoHS Free**

**MECHANICAL DATA :**

- \* Case : SMB Molded plastic
- \* Epoxy : UL94V-0 rate flame retardant
- \* Lead : Lead Formed for Surface Mount
- \* Polarity : Color band denotes cathode end
- \* Mounting position : Any
- \* Weight : 0.1079 gram

## GLASS PASSIVATED JUNCTION SILICON SURFACE MOUNT

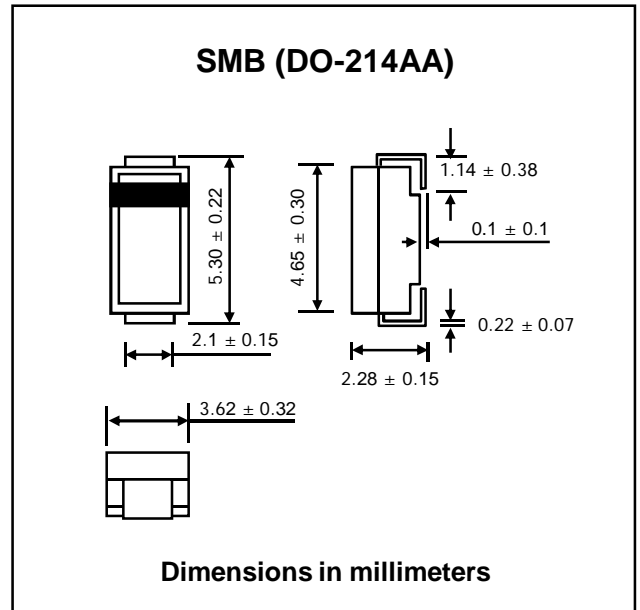

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25 °C ambient temperature unless otherwise specified.  
 Single phase, half wave, 60 Hz, resistive or inductive load.  
 For capacitive load, derate current by 20%.


RATING	SYMBOL	GN2A	GN2B	GN2D	GN2G	GN2J	GN2K	GN2M	UNIT
Maximum Repetitive Peak Reverse Voltage	V <sub>RRM</sub>	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V <sub>RMS</sub>	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V <sub>DC</sub>	50	100	200	400	600	800	1000	V
Maximum Average Forward Current Ta = 50 °C	I <sub>F(AV)</sub>	2.0							A
Peak Forward Surge Current 8.3ms Single half sine wave Superimposed on rated load (JEDEC Method)	I <sub>FSM</sub>	50							A
Maximum Forward Voltage at I <sub>F</sub> = 2.0 Amps.	V <sub>F</sub>	1.0							V
Maximum DC Reverse Current at rated DC Blocking Voltage	Ta = 25 °C	5.0							μA
	Ta = 100 °C	50							μA
Typical Junction Capacitance (Note1)	C <sub>J</sub>	75							pF
Junction Temperature Range	T <sub>J</sub>	- 65 to + 150							°C
Storage Temperature Range	T <sub>STG</sub>	- 65 to + 150							°C

**Note :**


(1) Measured at 1.0 MHz and applied reverse voltage of 4.0Vdc

**RATING AND CHARACTERISTIC CURVES ( GN2A - GN2M )**


**FIG.1 - DERATING CURVE FOR OUTPUT RECTIFIED CURRENT**

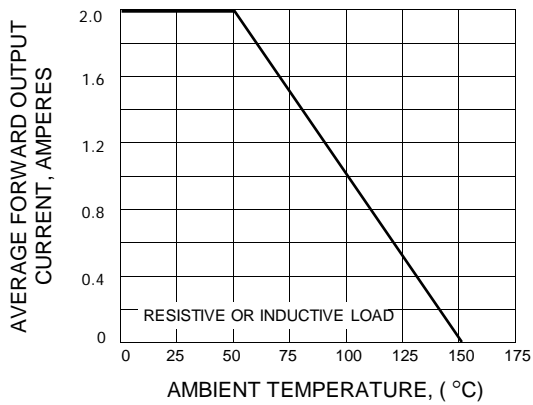

**FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT**

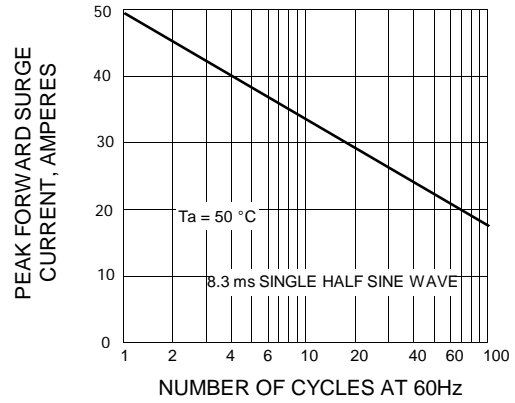

**FIG.3 - TYPICAL FORWARD CHARACTERISTICS**

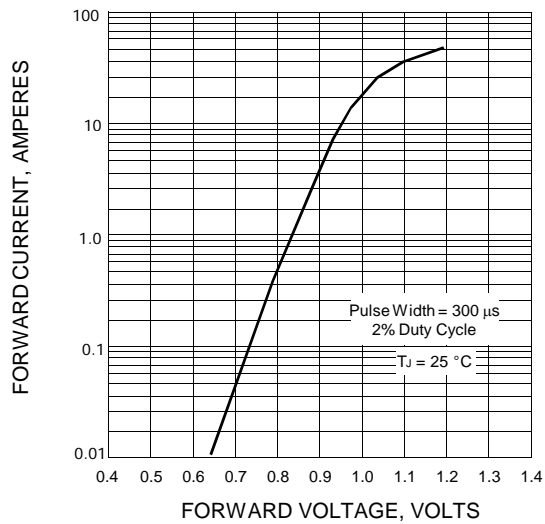

**FIG.4 - TYPICAL REVERSE CHARACTERISTICS**

