

# GP20 - 60

**PRV : 6000 Volts**  
**Io : 0.2 Ampere**


## FEATURES :

- \* Glass passivated junction
- \* High current capability
- \* High surge current capability
- \* High reliability
- \* Low reverse current
- \* Low forward voltage drop
- \* Pb / RoHS Free

## MECHANICAL DATA :

- \* Case : DO-41 Molded plastic
- \* Epoxy : UL94V-O rate flame retardant
- \* Lead : Axial lead solderable per MIL-STD-202, Method 208 guaranteed
- \* Polarity : Color band denotes cathode end
- \* Mounting position : Any
- \* Weight : 0.339 gram

## HIGH VOLTAGE GLASS PASSIVATED JUNCTION SILICON RECTIFIER

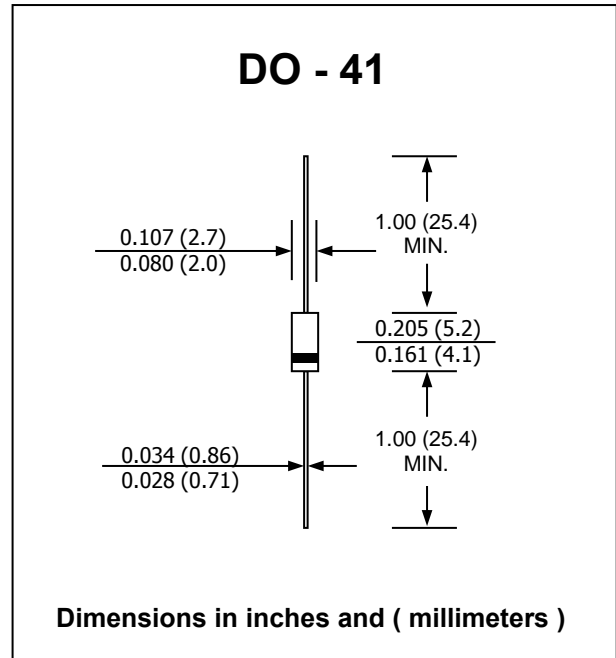

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25 °C ambient temperature unless otherwise specified.

Single phase, half wave, 60 Hz, resistive or inductive load.

For capacitive load, derate current by 20%.

| RATING  | SYMBOL | VALUE         | UNIT |
|---|--------|---------------|------|
| Maximum Recurrent Peak Reverse Voltage  | VRRM   | 6000          | V    |
| Maximum RMS Voltage   | VRMS   | 4200          | V    |
| Maximum DC Blocking Voltage   | VDC    | 6000          | V    |
| Maximum Average Forward Current<br>0.375"(9.5mm) Lead Length Ta = 55 °C                               | IF(AV) | 0.2           | A    |
| Peak Forward Surge Current 8.3 ms. Single half sine wave<br>Superimposed on rated load (JEDEC Method) | IFSM   | 25            | A    |
| Maximum Forward Voltage at 0.2 A  | VF     | 7.0           | V    |
| Maximum DC Reverse Current Ta = 25 °C   | IR     | 5.0           | μA   |
| at Rated DC Blocking Voltage Ta = 100 °C  | IR(H)  | 50            | μA   |
| Typical Reverse Recovery Time ( Note 1 )  | Trr    | 2.0           | μs   |
| Typical Junction Capacitance ( Note 2 )   | CJ     | 5.0           | pF   |
| Typical Thermal Resistance ( Note 3 )   | RθJA   | 130           | °C/W |
| Junction Temperature Range  | TJ     | - 65 to + 175 | °C   |
| Storage Temperature Range   | TSTG   | - 65 to + 175 | °C   |


### Notes :

- ( 1 ) Reverse Recovery Test Conditions : IF = 0.5 A, IR = 1.0 A, Irr = 0.25 A.
- ( 2 ) Measured at 1.0 MHz and applied reverse voltage of 4.0 VDC
- ( 3 ) Thermal Resistance from Junction to Ambient at 0.375"(9.5mm) Lead Lengths, P.C. Board Mounted.




**RATING AND CHARACTERISTIC CURVES ( GP20 - 60 )**


**FIG. 1 - DERATING CURVE FOR OUTPUT RECTIFIED CURRENT**

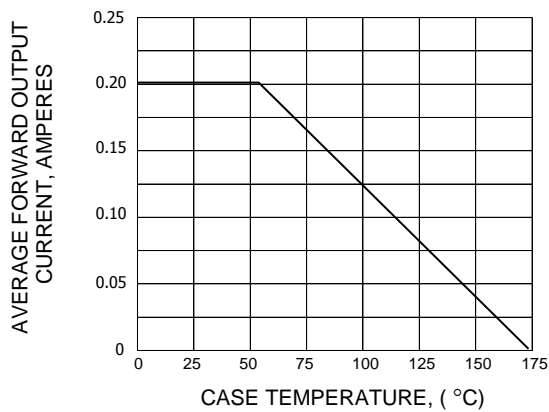


**FIG. 2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT**

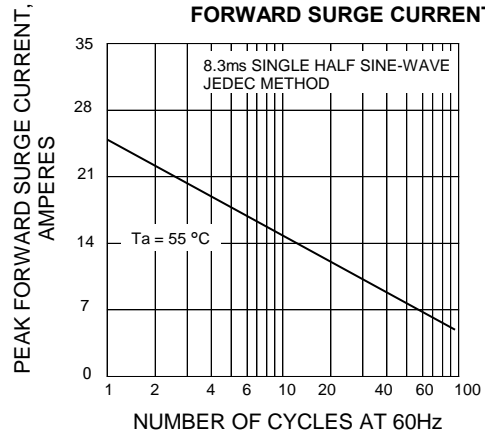

**FIG. 3 - TYPICAL FORWARD CHARACTERISTICS**

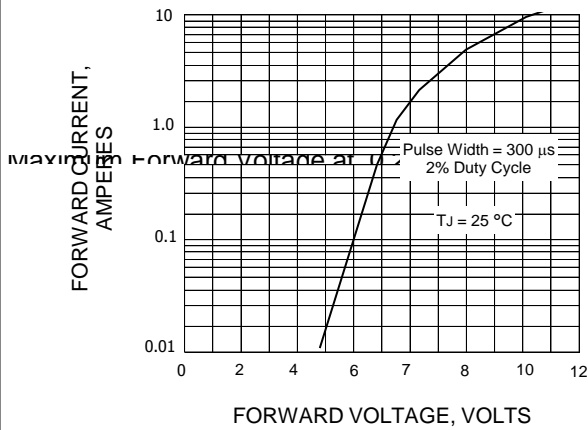

**FIG. 4 - TYPICAL REVERSE CHARACTERISTICS**

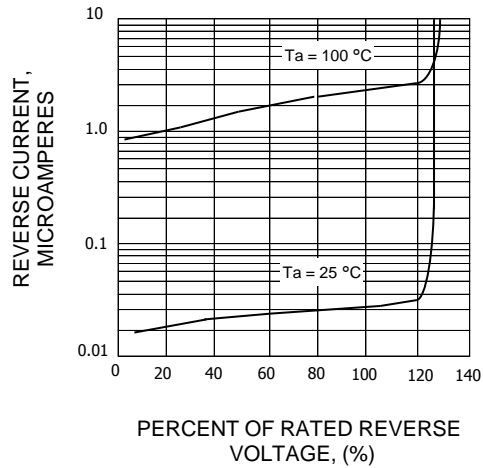

**FIG 5 . - TYPICAL JUNCTION CAPACITANCE**

