

## SDB12W THRU SDB120W


### Surface Mount Schottky Barrier Rectifier

Reverse Voltage - 20 to 200 V

Forward Current - 1 A

#### PINNING

PIN	DESCRIPTION
1	Cathode
2	Anode

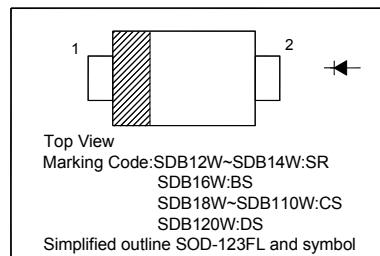

### Absolute Maximum Ratings and Characteristics

Ratings at  $T_a = 25^\circ\text{C}$  ambient temperature unless otherwise specified. Single phase, half wave, 60 Hz, resistive or inductive load. For capacitive load, derate current by 20%.

Parameter	Symbols	SDB12W	SDB14W	SDB16W	SDB18W	SDB110W	SDB120W	Units
Maximum Recurrent Peak Reverse Voltage	$V_{RRM}$	20	40	60	80	100	200	V
Maximum RMS Voltage	$V_{RMS}$	14	28	42	56	80	141	V
Maximum DC Blocking Voltage	$V_{DC}$	20	40	60	80	100	200	V
Maximum Average Forward Rectified Current at $T_L = 75^\circ\text{C}$	$I_{F(AV)}$	1						A
Peak Forward Surge Current 8.3 ms Single Half Sine-Wave Superimposed on Rated Load (JEDEC Method)	$I_{FSM}$	30						A
Maximum Forward Voltage at 1 A and 25°C	$V_F$	0.55		0.7	0.85			V
Maximum Reverse Current $T_a = 25^\circ\text{C}$ at Rated DC Blocking Voltage $T_a = 100^\circ\text{C}$	$I_R$	0.1 10				0.002 10	mA	
Typical Junction Capacitance	$C_J$	110 <sup>1)</sup>				23 <sup>2)</sup>	pF	
Typical Thermal Resistance <sup>3)</sup>	$R_{\theta JA}$	75				132	°C/W	
Operating Junction Temperature Range	$T_j$	- 55 to + 125						°C
Storage Temperature Range	$T_{stg}$	- 55 to + 150						°C

<sup>1)</sup> Measured at 1 MHz and applied reverse voltage of 4 V.

<sup>2)</sup> Measured at 1 MHz and applied reverse voltage of 5 V.

<sup>3)</sup> Thermal resistance junction to ambient 0.24" x 0.24"(6 x 6 mm) copper pads to each terminals

FIG.1 FORWARD CURRENT DERATING CURVE

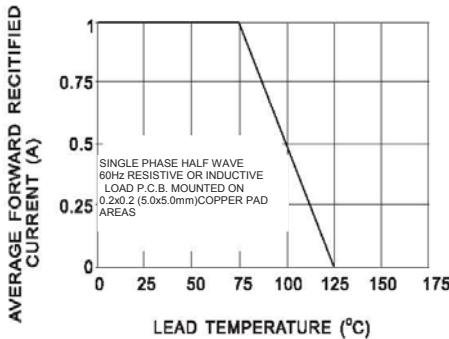


FIG.3-MAXIMUM NON-REPETITIVE FORWARD SURGE CURRENT

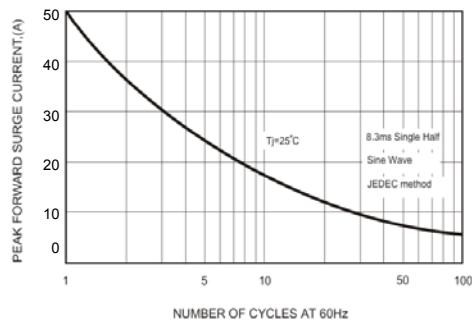


FIG.4-TYPICAL JUNCTION CAPACITANCE

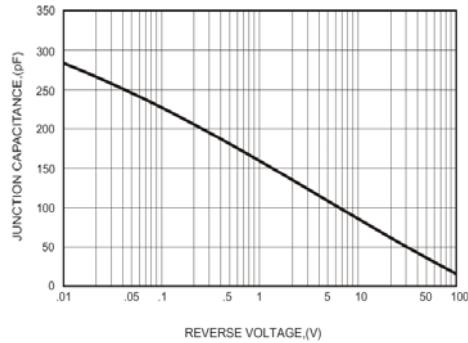


FIG.2-TYPICAL FORWARD CHARACTERISTICS


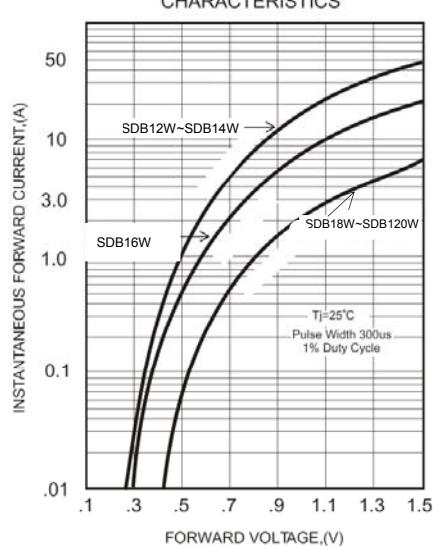



FIG.5 - TYPICAL REVERSE CHARACTERISTICS

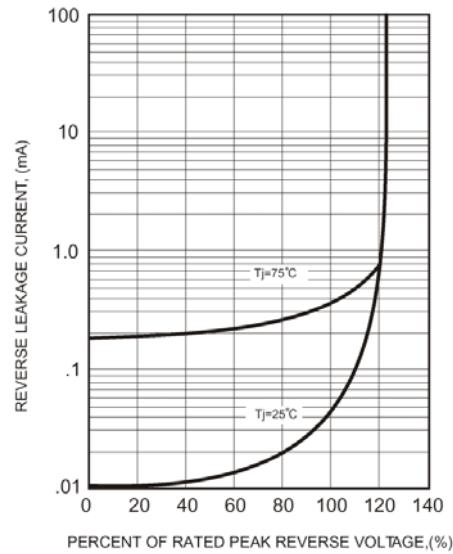

## PACKAGE OUTLINE


Plastic surface mounted package; 2 leads

**SOD-123FL**

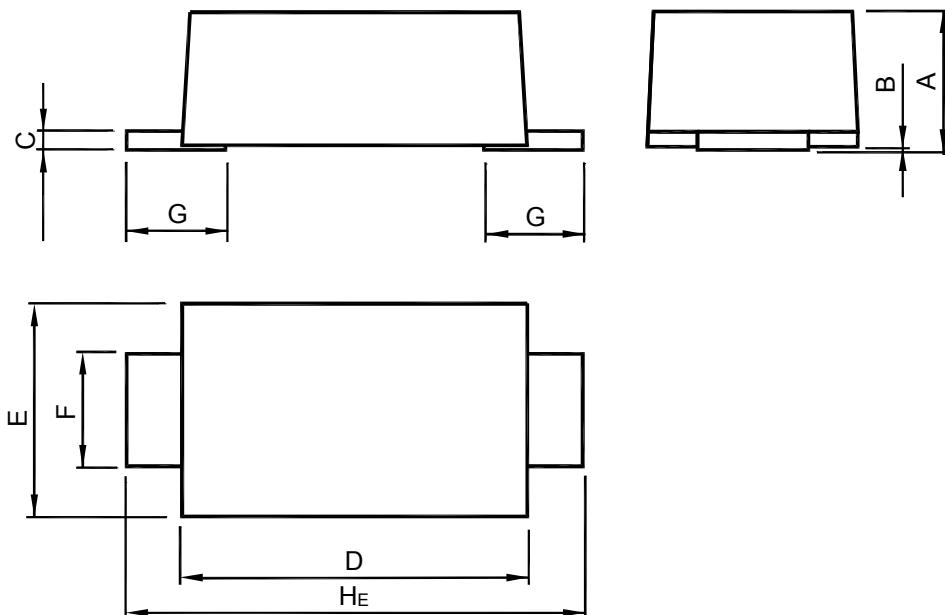

UNIT	A	B	C	D	E	F	G	H <sub>E</sub>
mm	1.08 0.88	0.1 0	0.2 0.1	2.9 2.6	1.9 1.7	1.1 0.8	0.9 0.7	3.9 3.5

## Recommended Soldering Footprint

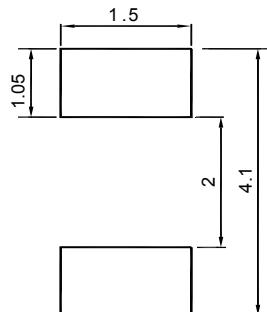

## Packing information

Package	Tape Width (mm)	Pitch		Reel Size		Per Reel Packing Quantity
		mm	inch	mm	inch	
SOD-123FL	8	4 ± 0.1	0.157 ± 0.004	178	7	3,000