

# RGP15A - RGP15M

**PRV : 50 - 1000 Volts**  
**Io : 1.5 Amperes**


**FEATURES :**

- \* High reliability
- \* Low reverse current
- \* Low forward voltage drop
- \* Fast switching for high efficiency
- \* Pb / RoHS Free

**MECHANICAL DATA :**

- \* Case : DO-15 Molded plastic
- \* Epoxy : UL94V-O rate flame retardant
- \* Lead : Axial lead solderable per MIL-STD-202, Method 208 guaranteed
- \* Polarity : Color band denotes cathode end
- \* Mounting position : Any
- \* Weight : 0.4 gram

# FAST RECOVERY RECTIFIER

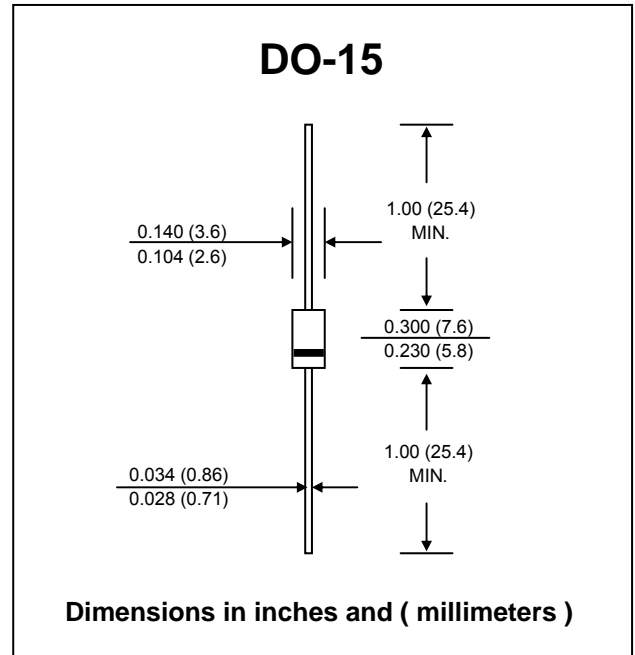

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25 °C ambient temperature unless otherwise specified.  
 Single phase, half wave, 60 Hz, resistive or inductive load.  
 For capacitive load, derate current by 20%.


RATING	SYMBOL	RG 15A	RG 15B	RG 15D	RG 15G	RG 15J	RG 15K	RG 15M	UNIT
Maximum Recurrent Peak Reverse Voltage	$V_{RRM}$	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	$V_{RMS}$	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	$V_{DC}$	50	100	200	400	600	800	1000	V
Maximum Average Forward Current 0.375"(9.5mm) Lead Length Ta = 55 °C	$I_{F(AV)}$	1.5							A
Peak Forward Surge Current, 8.3ms Single half sine wave Superimposed on rated load (JEDEC Method)	$I_{FSM}$	50							A
Maximum Peak Forward Voltage at $I_F = 1.5 A$	$V_F$	1.3							V
Maximum DC Reverse Current Ta = 25 °C at Rated DC Blocking Voltage Ta = 150 °C	$I_R$	5.0							$\mu A$
	$I_{R(H)}$	200							$\mu A$
Maximum Reverse Recovery Time ( Note 1 )	$T_{rr}$	150			250		500		ns
Typical Junction Capacitance ( Note 2 )	$C_J$	25							pF
Typical Thermal Resistance ( Note 3 )	$R_{\theta JA}$	30							°C/W
Junction Temperature Range	$T_J$	- 65 to + 175							°C
Storage Temperature Range	$T_{STG}$	- 65 to + 175							°C

**Notes :**

- ( 1 ) Reverse Recovery Test Conditions :  $I_F = 0.5 A$ ,  $I_R = 1.0 A$ ,  $I_{rr} = 0.25 A$ .
- ( 2 ) Measured at 1.0 MHz and applied reverse voltage of 4.0 V<sub>DC</sub>
- ( 3 ) Thermal Resistance from Junction to Ambient at 0.375" (9.5mm) Lead Lengths, P.C. Board Mounted.

## RATING AND CHARACTERISTIC CURVES ( RGP15A - RGP15M )

FIG.1 - REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

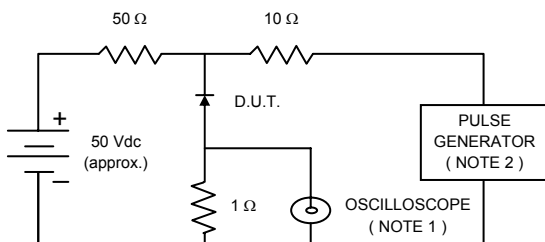

NOTES : 1. Rise Time = 7 ns max., Input Impedance = 1 megaohm, 22 pF.  
 2. Rise time = 10 ns max., Source Impedance = 50 ohms.  
 3. All Resistors = Non-inductive Types.

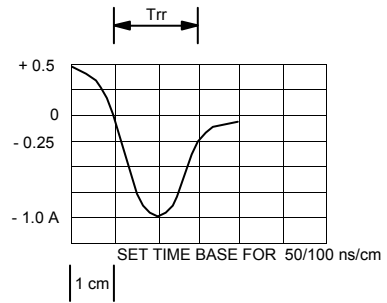


FIG.2 - DERATING CURVE FOR OUTPUT RECTIFIED CURRENT

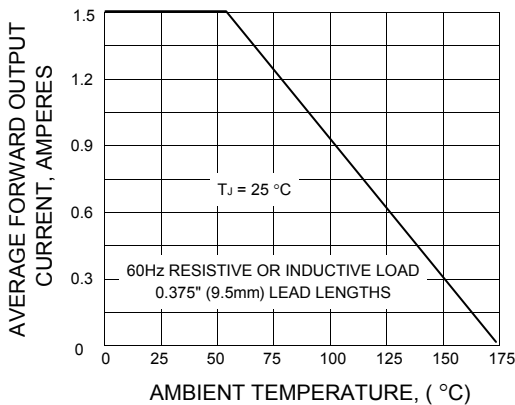


FIG.3 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

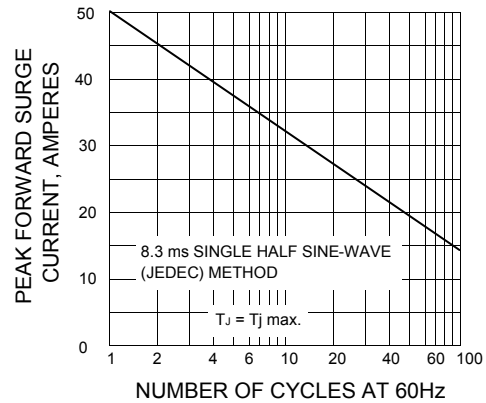


FIG.4 - TYPICAL FORWARD CHARACTERISTICS

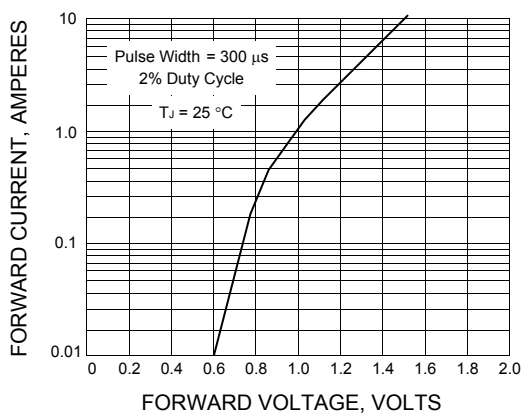


FIG.5 - TYPICAL REVERSE CHARACTERISTICS

