

FR501G - FR507G

GLASS PASSIVATED JUNCTION FAST RECOVERY RECTIFIERS


PRV : 50 - 1000 Volts
Io : 5.0 Amperes

FEATURES :

- * Glass passivated junction chip
- * High current capability
- * High surge current capability
- * High reliability
- * Low reverse current
- * Low forward voltage drop
- * Fast switching for high efficiency
- * Pb / RoHS Free

MECHANICAL DATA :

- * Case : DO-201AD Molded plastic
- * Epoxy : UL94V-O rate flame retardant
- * Lead : Axial lead solderable per MIL-STD-202, Method 208 guaranteed
- * Polarity : Color band denotes cathode end
- * Mounting position : Any
- * Weight : 1.16 grams

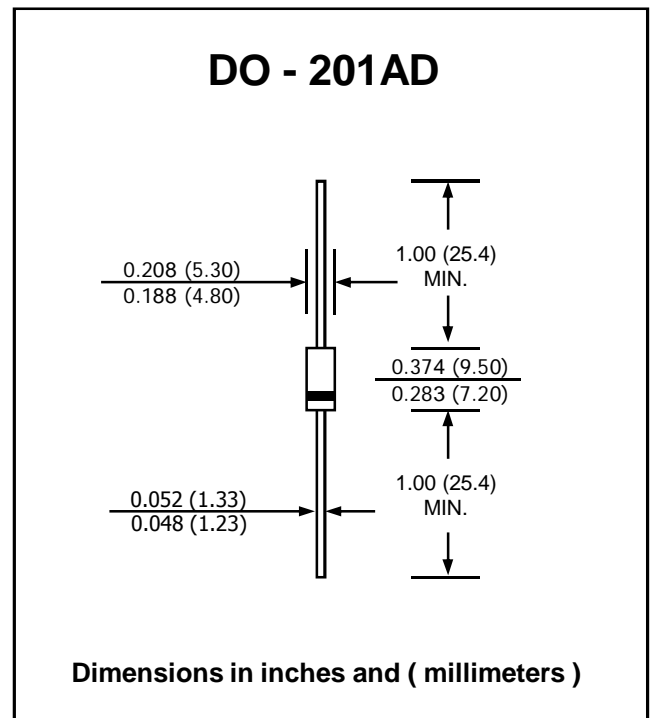

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25 °C ambient temperature unless otherwise specified.
Single phase, half wave, 60 Hz, resistive or inductive load.
For capacitive load, derate current by 20%.


| RATING | SYMBOL | FR501G | FR502G | FR503G | FR504G | FR505G | FR506G | FR507G | UNIT |
|--|--------------------|---------------|--------|--------|--------|--------|--------|--------|------|
| Maximum Recurrent Peak Reverse Voltage | V _{RRM} | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | V |
| Maximum RMS Voltage | V _{RMS} | 35 | 70 | 140 | 280 | 420 | 560 | 700 | V |
| Maximum DC Blocking Voltage | V _{DC} | 50 | 100 | 200 | 400 | 600 | 800 | 1000 | V |
| Maximum Average Forward Current Half-Wave Resistive Load Ta = 75 °C | I _{F(AV)} | 5.0 | | | | | | | A |
| Peak Forward Surge Current 8.3ms Single half sine wave Superimposed on rated load (JEDEC Method) | I _{FSM} | 200 | | | | | | | A |
| Maximum Peak Forward Voltage at I _F = 5 A | V _F | 1.3 | | | | | | | V |
| Maximum DC Reverse Current at V _{RRM} | I _R | 10 | | | | | | | μA |
| Maximum Reverse Recovery Time (Note 1) | T _{rr} | 150 | | | | 250 | 500 | | ns |
| Junction Temperature Range | T _J | - 65 to + 150 | | | | | | | °C |
| Storage Temperature Range | T _{STG} | - 65 to + 150 | | | | | | | °C |

Notes :

(1) Reverse Recovery Test Conditions : I_F = 0.5 A, I_R = 1.0 A, I_{rr} = 0.25 A.

RATING AND CHARACTERISTIC CURVES (FR501G - FR507G)

FIG.1 - REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

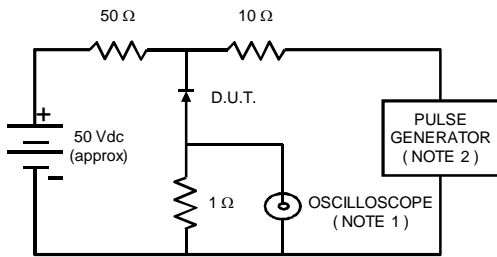

NOTES : 1. Rise Time = 7 ns max., Input Impedance = 1 megaohm, 22 pF.
 2. Rise time = 10 ns max., Source Impedance = 50 ohms.
 3. All Resistors = Non-inductive Types.

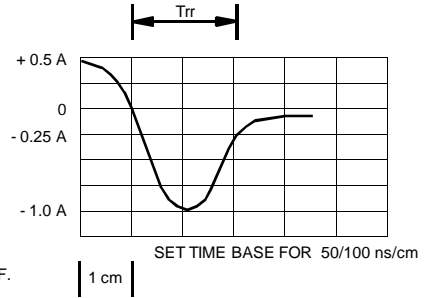


FIG.2 - DERATING CURVE FOR OUTPUT RECTIFIED CURRENT

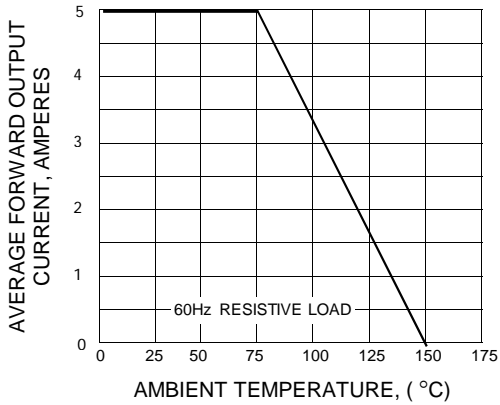


FIG.3 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

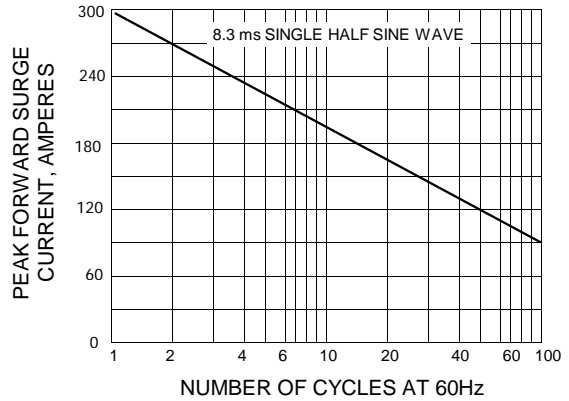


FIG.4 - TYPICAL FORWARD CHARACTERISTICS

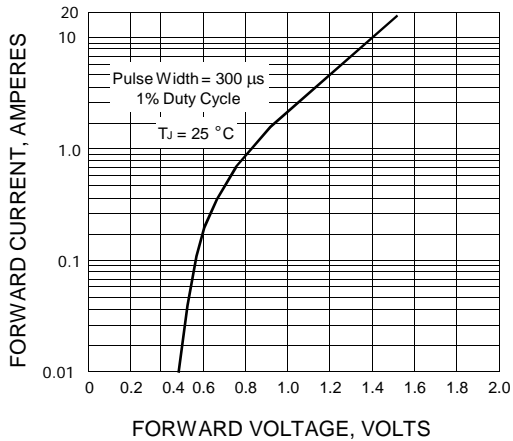


FIG.5 - TYPICAL REVERSE CHARACTERISTICS

