

# SHV- 08J

## HIGH VOLTAGE RECTIFIER DIODE


**PRV : 4000 Volts**  
**Io : 30 mA**

### FEATURES :

- \* Glass passivated junction chip
- \* High voltage capability
- \* High surge current capability
- \* High reliability
- \* Low reverse current
- \* Low forward voltage drop
- \* High voltage diode for Igniters
- \* **Pb / RoHS Free**

### MECHANICAL DATA :

- \* Case : DO-41 Molded plastic
- \* Epoxy : UL94V-0 rate flame retardant
- \* Lead : Axial lead solderable per MIL-STD-202, Method 208 guaranteed
- \* Polarity : Color band denotes cathode end
- \* Mounting position : Any
- \* Weight : 0.34 gram

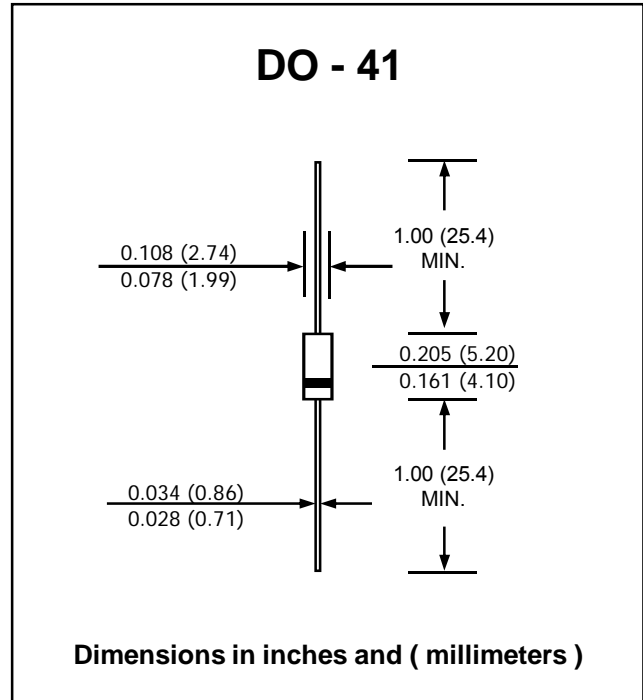

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25 °C ambient temperature unless otherwise specified.

RATING	SYMBOL	VALUE	UNITS
Maximum Peak Reverse Voltage	$V_{RM}$	4000	V
Maximum Average Forward Current	$I_{F(AV)}$	30	mA
Surge Forward Current Half cycle sine-wave, positive side, 10ms, 1 shot	$I_{FSM}$	3	A
Maximum Peak Forward Voltage at $I_F = 10$ mA.	$V_F$	8.0	V
Maximum Reverse Current at $V_R = V_{RM}$	$I_R$	10	$\mu A$
Zener Voltage at $I_R = 100 \mu A$	$V_{Z(Min.)}$	4.5	kV
	$V_{Z(Max.)}$	8.0	
Operating Junction Temperature Range	$T_J$	- 40 to + 150	°C
Storage Temperature Range	$T_{STG}$	- 40 to + 150	°C