

# RK46

**PRV : 60 Volts**  
**I<sub>o</sub> : 3.5 Amperes**


**FEATURES :**

- \* High current capability
- \* High surge current capability
- \* High reliability
- \* High efficiency
- \* Low power loss
- \* Low cost
- \* Low forward voltage drop
- \* Pb / RoHS Free

**MECHANICAL DATA :**

- \* Case : DO-201AD Molded plastic
- \* Epoxy : UL94V-O rate flame retardant
- \* Lead : Axial lead solderable per MIL-STD-202, Method 208 guaranteed
- \* Polarity : Color band denotes cathode end
- \* Mounting position : Any
- \* Weight : 1.1 grams

# SCHOTTKY BARRIER RECTIFIER DIODE

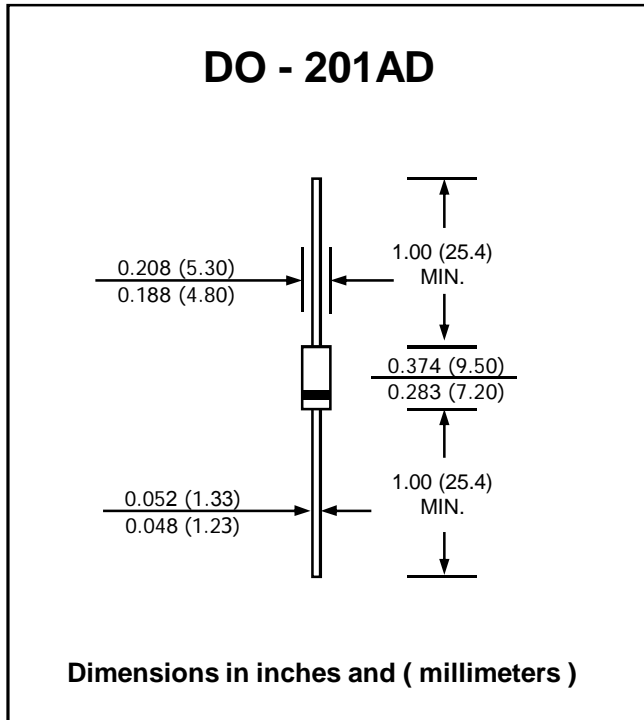


## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25 °C ambient temperature unless otherwise specified.  
 Single phase, half wave, 60 Hz, resistive or inductive load.  
 For capacitive load, derate current by 20%.


RATING	SYMBOL	VALUE	UNIT
Maximum Peak Reverse Voltage	V <sub>RM</sub>	60	V
Maximum Peak Reverse Surge Voltage	V <sub>RSM</sub>	60	V
Maximum Average Forward Current T <sub>L</sub> = 109 °C	I <sub>F(AV)</sub>	3.5	A
Maximum Peak Forward Surge Current, 8.3ms single half sine wave Superimposed on rated load (JEDEC Method) T <sub>L</sub> = 75°C	I <sub>FSM</sub>	70	A
Maximum Forward Voltage at I <sub>F</sub> = 3.5 A	V <sub>F</sub>	0.62	V
Maximum Reverse Current at V <sub>RM</sub> Ta = 25 °C	I <sub>R</sub>	3	mA
Maximum Reverse Current at V <sub>RM</sub> Ta = 100 °C	I <sub>R(H)</sub>	35	mA
Junction Temperature Range	T <sub>J</sub>	- 40 to + 150	°C
Storage Temperature Range	T <sub>STG</sub>	- 40 to + 150	°C

## RATING AND CHARACTERISTIC CURVES ( RK46 )


**FIG.1 - DERATING CURVE FOR OUTPUT RECTIFIED CURRENT**

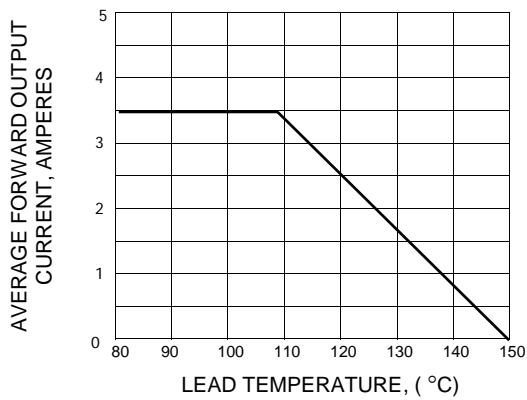

**FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT**

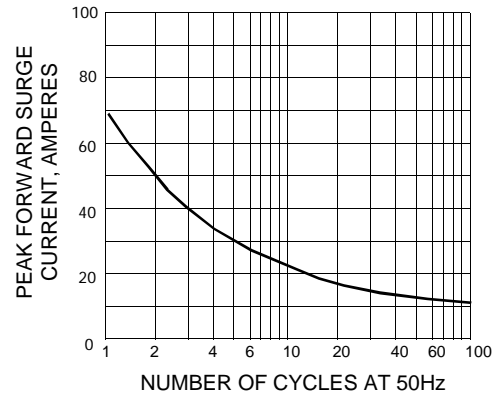

**FIG.3 - TYPICAL FORWARD CHARACTERISTICS**

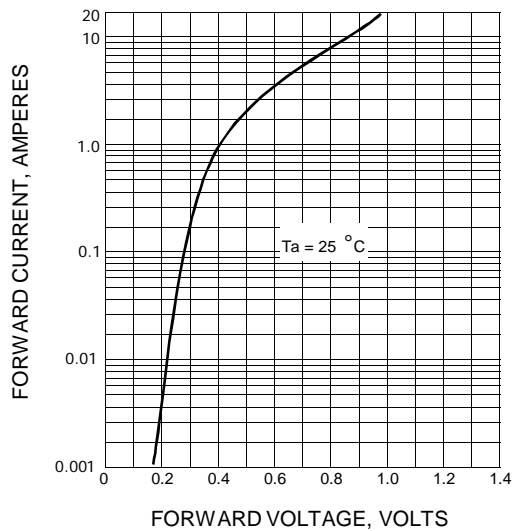

**FIG.4 - TYPICAL REVERSE CHARACTERISTICS**

