

SZ452H - SZ45D0

V_Z : 2.7 - 200 Volts

P_D : 2 Watts


FEATURES :

- * Complete Voltage Range 2.7 to 200 Volts
- * High peak reverse power dissipation
- * High reliability
- * Low leakage current
- * Pb / RoHS Free

MECHANICAL DATA

- * Case : SMA (DO-214AC) Molded plastic
- * Epoxy : UL94V-0 rate flame retardant
- * Lead : Lead formed for Surface mount
- * Polarity : Color band denotes cathode end
- * Mounting position : Any
- * Weight : 0.064 grams

SURFACE MOUNT SILICON ZENER DIODES

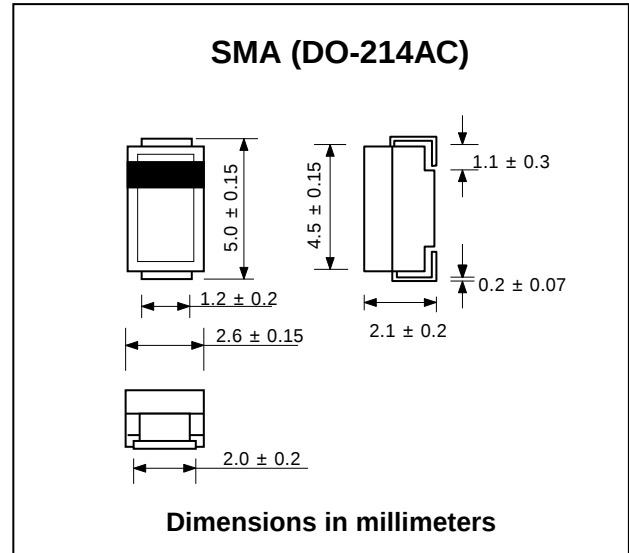

MAXIMUM RATINGS

Rating at 25 °C ambient temperature unless otherwise specified

Rating	Symbol	Value	Unit
DC Power Dissipation at T _L = 75 °C (Note1)	P _D	2.0	W
Maximum Forward Voltage at I _F = 200 mA	V _F	1.2	V
Junction Temperature Range	T _J	- 55 to + 150	°C
Storage Temperature Range	T _S	- 55 to + 150	°C

Note :

(1) T_L = Lead temperature at 5.0 mm² (0.013 mm thick) copper land areas.



ELECTRICAL CHARACTERISTICS

Rating at 25 °C ambient temperature unless otherwise specified

Type No.	Nominal Zener Voltage		Maximum Zener Impedance			Maximum Reverse Leakage Current		Maximum DC Zener Current	Maximum Surge Current
	V _Z @ I _{ZT}	I _{ZT}	Z _{ZT} @ I _{ZT}	Z _{ZK} @ I _{ZK}	I _{ZK}	I _R @ V _R		I _{ZM}	I _{ZSM} ⁽³⁾
	(V)	(mA)	(Ω)	(Ω)	(mA)	(μA)	(V)	(mA)	(A)
SZ452H	2.7	80	10	400	1.0	100	1.0	660	6.14
SZ453A	3.0	160	8.0	400	1.0	100	1.0	600	5.53
SZ453D	3.3	145	8.0	400	1.0	80	1.0	545	5.03
SZ453G	3.6	139	5.0	400	1.0	80	1.0	504	4.60
SZ453J	3.9	128	5.0	400	1.0	30	1.0	468	4.40
SZ454D	4.3	116	4.5	400	1.0	20	1.0	434	4.10
SZ454H	4.7	106	4.5	550	1.0	5.0	1.0	386	3.30
SZ455B	5.1	98.0	3.5	600	1.0	5.0	1.0	356	3.50
SZ455G	5.6	89.5	2.5	500	1.0	5.0	2.0	324	3.30
SZ456C	6.2	80.5	1.5	700	1.0	5.0	3.0	292	3.10
SZ456I	6.8	73.5	2.0	700	1.0	5.0	4.0	266	2.90
SZ457F	7.5	66.5	2.0	700	0.5	5.0	5.0	242	2.66
SZ458C	8.2	61.0	2.3	700	0.5	5.0	6.0	220	2.44
SZ459B	9.1	55.0	2.5	700	0.5	3.0	7.0	200	2.20
SZ4510	10	50.0	3.5	700	0.25	3.0	7.6	182	2.00
SZ4511	11	45.5	4.0	700	0.25	1.0	8.4	166	1.82
SZ4512	12	41.5	4.5	700	0.25	1.0	9.1	152	1.66
SZ4513	13	38.5	5.0	700	0.25	0.5	9.9	138	1.54
SZ4514	14	35.7	5.5	700	0.25	0.5	10.6	130	1.43
SZ4515	15	33.4	7.0	700	0.25	0.5	11.4	122	1.33
SZ4516	16	31.2	8.0	700	0.25	0.5	12.2	114	1.25
SZ4517	17	29.4	9.0	750	0.25	0.5	13.0	107	1.18
SZ4518	18	27.8	10	750	0.25	0.5	13.7	100	1.11
SZ4519	19	26.3	11	750	0.25	0.5	14.4	95	1.05
SZ4520	20	25.0	11	750	0.25	0.5	15.2	90	1.00
SZ4522	22	22.8	12	750	0.25	0.5	16.7	82	0.91
SZ4524	24	20.8	13	750	0.25	0.5	18.2	76	0.83
SZ4527	27	18.5	18	750	0.25	0.5	20.6	68	0.74
SZ4530	30	16.6	20	1000	0.25	0.5	22.5	60	0.67
SZ4533	33	15.1	23	1000	0.25	0.5	25.1	55	0.61
SZ4536	36	13.9	25	1000	0.25	0.5	27.4	50	0.56
SZ4539	39	12.8	30	1000	0.25	0.5	29.7	47	0.51
SZ4543	43	11.6	35	1500	0.25	0.5	32.7	43	0.45
SZ4547	47	10.6	40	1500	0.25	0.5	35.8	39	0.42
SZ4551	51	9.8	48	1500	0.25	0.5	38.8	36	0.39
SZ4556	56	9.0	55	2000	0.25	0.5	42.6	32	0.36
SZ4562	62	8.1	60	2000	0.25	0.5	47.1	29	0.32
SZ4568	68	7.4	75	2000	0.25	0.5	51.7	27	0.29
SZ4575	75	6.7	90	2000	0.25	0.5	56.0	24	0.27
SZ4582	82	6.1	100	3000	0.25	0.5	62.2	22	0.24
SZ4591	91	5.5	125	3000	0.25	0.5	69.2	20	0.22
SZ45B0	100	5.0	175	3000	0.25	0.5	76.0	18	0.20
SZ45B1	110	4.5	250	4000	0.25	0.5	83.6	17	0.18
SZ45B2	120	4.2	325	4500	0.25	0.5	91.2	15	0.16
SZ45B3	130	3.8	400	5000	0.25	0.5	98.8	14	0.15
SZ45B4	140	3.6	500	5500	0.25	0.5	106.4	13	0.14
SZ45B5	150	3.3	575	6000	0.25	0.5	114.0	12	0.13
SZ45B6	160	3.1	650	6500	0.25	0.5	121.6	11	0.12
SZ45B7	170	2.9	675	7000	0.25	0.5	130.4	11	0.12
SZ45B8	180	2.8	725	7000	0.25	0.5	136.8	10	0.11
SZ45B9	190	2.6	825	8000	0.25	0.5	144.8	10	0.10
SZ45D0	200	2.5	900	8000	0.25	0.5	152.0	9.0	0.10

Notes :

- (1) The type number listed have a standard tolerance on the nominal zener voltage of $\pm 5.0\%$, altered the fourth number of type from "5" for $\pm 5.0\%$ tolerance to be "0" for $\pm 10\%$ tolerance.
- (2) "SZ" will be omitted in marking on the diode.
- (3) Maximum Surge Current I_{ZSM} is a non-recurrent maximum peak reverse surge with a pulse width of 8.3 ms.

RATING AND CHARACTERISTIC CURVES (SZ452H - SZ45D0)

Fig 1. TYPICAL THERMAL RESPONSE L

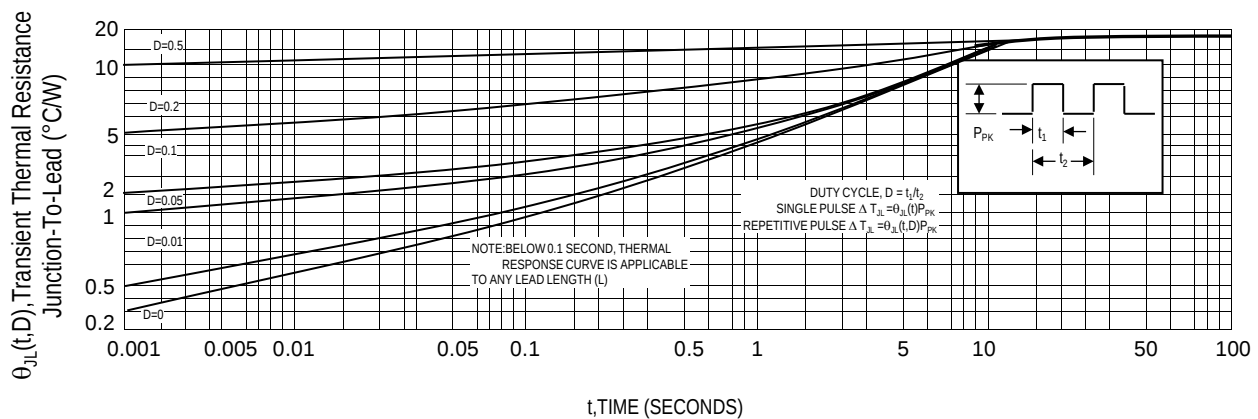


Fig.2 MAXIMUM SURGE POWER

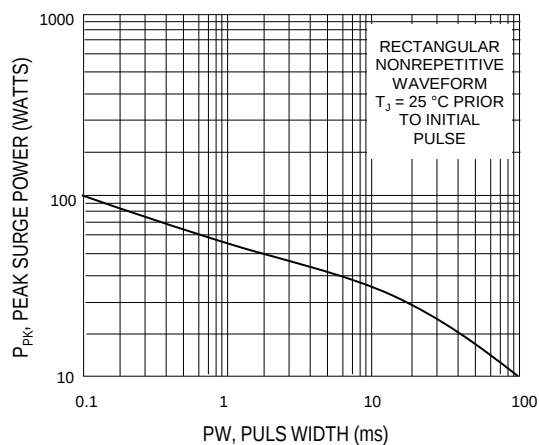


Fig. 3 POWER TEMPERATURE DERATING CURVE

