



www.eicsemi.com

# 1A1 ~ 1A7

**PRV : 50 - 1000 Volts**

**Io : 1.0 Ampere**


## FEATURES :

- \* Glass passivated junction chip
- \* High current capability
- \* High reliability
- \* Low reverse current
- \* Low forward voltage drop
- \* **Pb / RoHS Free**

## MECHANICAL DATA :

- \* Case : Molded plastic
- \* Epoxy : UL94V-O rate flame retardant
- \* Lead : Axial lead solderable per MIL-STD-202, Method 208 guaranteed
- \* Polarity : Color band denotes cathode end
- \* Mounting position : Any
- \* Weight : 0.20 gram

## GLASS PASSIVATED JUNCTION SILICON RECTIFIER

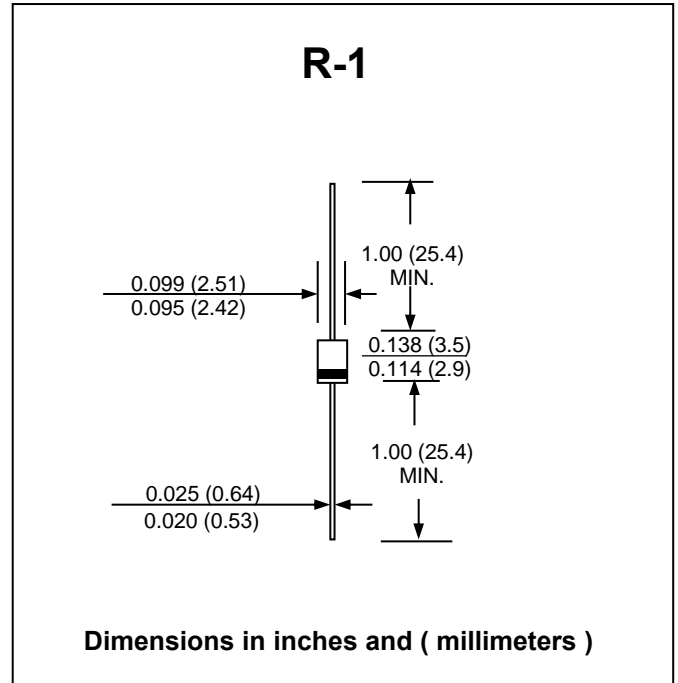

## MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25 °C ambient temperature unless otherwise specified.  
Single phase, half wave, 60 Hz, resistive or inductive load.  
For capacitive load, derate current by 20%.

RATING	SYMBOL	1A1	1A2	1A3	1A4	1A5	1A6	1A7	UNIT
Maximum Repetitive Peak Reverse Voltage	V <sub>RRM</sub>	50	100	200	400	600	800	1000	V
Maximum RMS Voltage	V <sub>RMS</sub>	35	70	140	280	420	560	700	V
Maximum DC Blocking Voltage	V <sub>DC</sub>	50	100	200	400	600	800	1000	V
Maximum Average Forward Current 0.375"(9.5mm) Lead Length Ta = 50 °C	I <sub>F(AV)</sub>	1.0							A
Peak Forward Surge Current 8.3ms Single half sine wave Superimposed on rated load (JEDEC Method)	I <sub>FSM</sub>	30							A
Maximum Forward Voltage at I <sub>F</sub> = 1.0 A.	V <sub>F</sub>	1.1							V
Maximum DC Reverse Current Ta = 25 °C at rated DC Blocking Voltage Ta = 100 °C	I <sub>R</sub>	5.0							μA
	I <sub>R(H)</sub>	50							μA
Typical Junction Capacitance (1)	C <sub>J</sub>	15							pF
Typical Thermal Resistance (2)	R <sub>θJA</sub>	50							°C/W
Junction Temperature Range	T <sub>J</sub>	- 65 to + 125							°C
Storage Temperature Range	T <sub>STG</sub>	- 65 to + 150							°C


### Notes :

- (1) Measured at 1.0 MHz and applied reverse voltage of 4.0VDC
- (2) Thermal Resistance from Junction to Ambient 0.375" (9.5mm) Lead Length




### RATING AND CHARACTERISTIC CURVES ( 1A1 - 1A7 )


**FIG.1 - DERATING CURVE FOR OUTPUT RECTIFIED CURRENT**

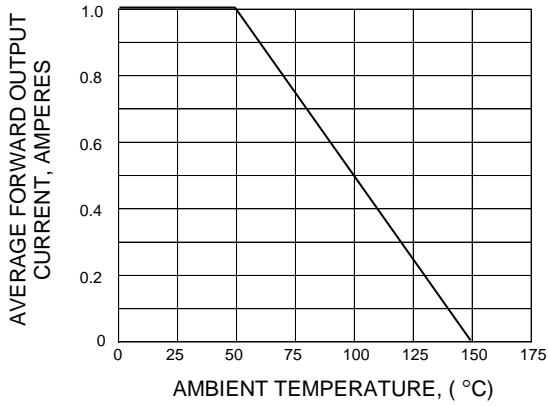

**FIG.2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT**

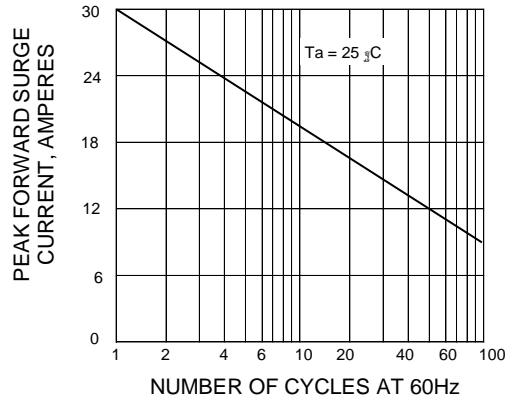

**FIG.3 - TYPICAL FORWARD CHARACTERISTICS**

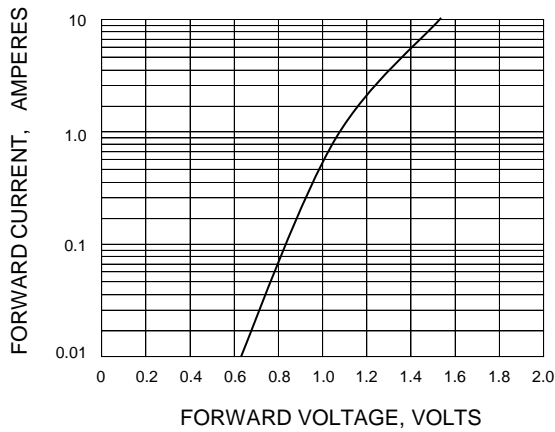

**FIG.4 - TYPICAL REVERSE CHARACTERISTICS**

