

RG1C

PRV : 1000 Volts
Io : 0.7 Ampere


FEATURES :

- * High current capability
- * High surge current capability
- * High reliability
- * Low reverse current
- * Low forward voltage drop
- * Fast switching for high efficiency
- * **Pb / RoHS Free**

MECHANICAL DATA :

- * Case : D2 Molded plastic
- * Epoxy : UL94V-O rate flame retardant
- * Lead : Axial lead solderable per MIL-STD-202, Method 208 guaranteed
- * Polarity : Color band denotes cathode end
- * Mounting position : Any
- * Weight : 0.465 gram

ULTRA FAST RECOVERY RECTIFIER DIODE

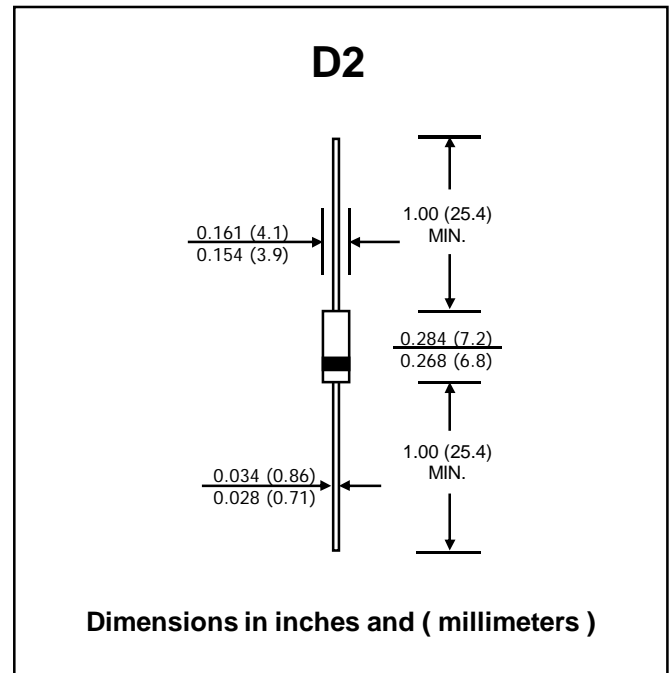

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25 °C ambient temperature unless otherwise specified.
 Single phase, half wave, 60 Hz, resistive or inductive load.
 For capacitive load, derate current by 20%.

RATING	SYMBOL	VALUE	UNIT
Maximum Peak Reverse Voltage	V _{RM}	1000	V
Maximum Peak Reverse Surge Voltage	V _{RSM}	1000	V
Maximum Average Rectified Forward Current (Note1)	I _{F(AV)}	0.7	A
Maximum Peak Forward Surge Current (50 Hz, Half-cycle, Sine wave, Single Shot)	I _{FSM}	10	A
Maximum Forward Voltage at I _F = 0.7 A	V _F	3.3	V
Maximum Forward Current	I _F	0.5	A
Maximum Reverse Current at Reverse voltage	I _R	20	μA
Maximum Reverse Current at Reverse voltage Ta = 100 °C	I _{R(H)}	0.25	mA
Maximum Reverse Recovery Time (Note 2)	T _{rr}	100	ns
Junction Temperature Range	T _J	- 40 to + 150	°C
Storage Temperature Range	T _{STG}	- 40 to + 150	°C

Notes :

- (1) Lead Length 10 mm.
- (2) Reverse Recovery Test Conditions : I_F = 100 mA, I_{RP} = 100 mA.

RATING AND CHARACTERISTIC CURVES (RG1C)

FIG.1 - REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

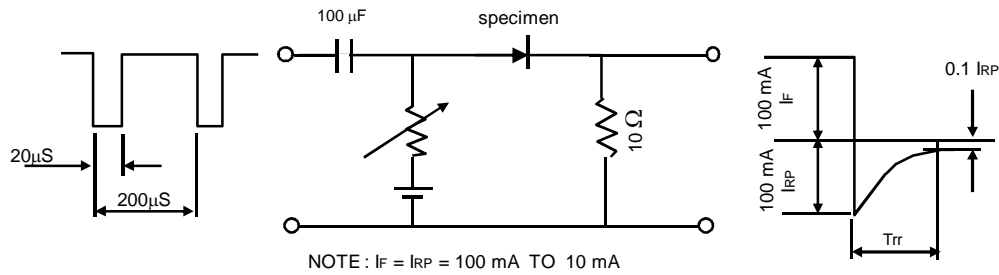


FIG.2 - DERATING CURVE FOR OUTPUT RECTIFIED CURRENT

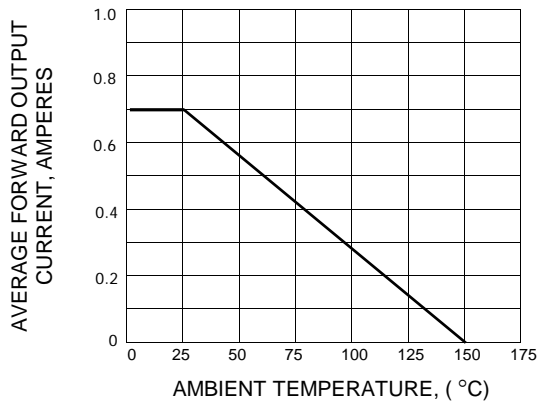


FIG.3 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

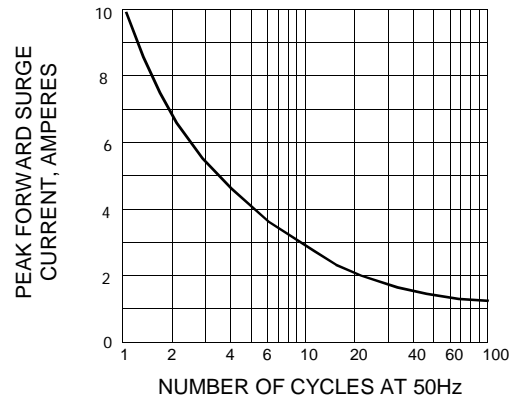


FIG.4 - TYPICAL FORWARD CHARACTERISTICS

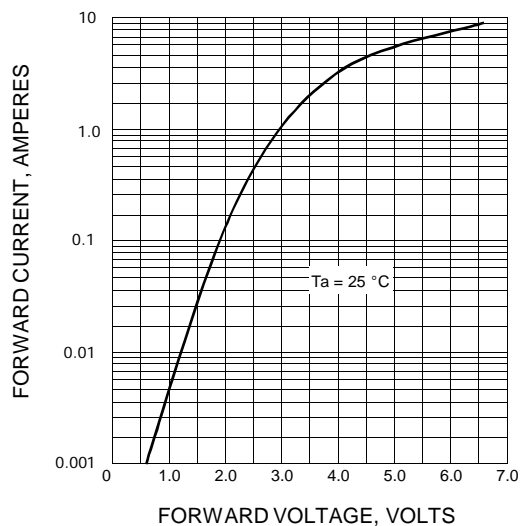


FIG.5 - TYPICAL REVERSE CHARACTERISTICS

