

SMR1A - SMR1K

GLASS PASSIVATED JUNCTION FAST RECOVERY RECTIFIER


PRV : 50 - 800 Volts
I_o : 1.0 Ampere

FEATURES :

- * Glass passivated junction chip
- * High current capability
- * High reliability
- * Low reverse current
- * Low forward voltage drop
- * **Pb Free / RoHS Compliant**

MECHANICAL DATA :

- * Case: JEDEC SOD-123FL, molded plastic over passivated chip
- * Terminals: Solder Plated, solderable per MIL-STD-750, Method 2026
- * Polarity: Color band denotes cathode end
- * Mounting position : Any
- * Weight: 0.02 gram (Approximate)

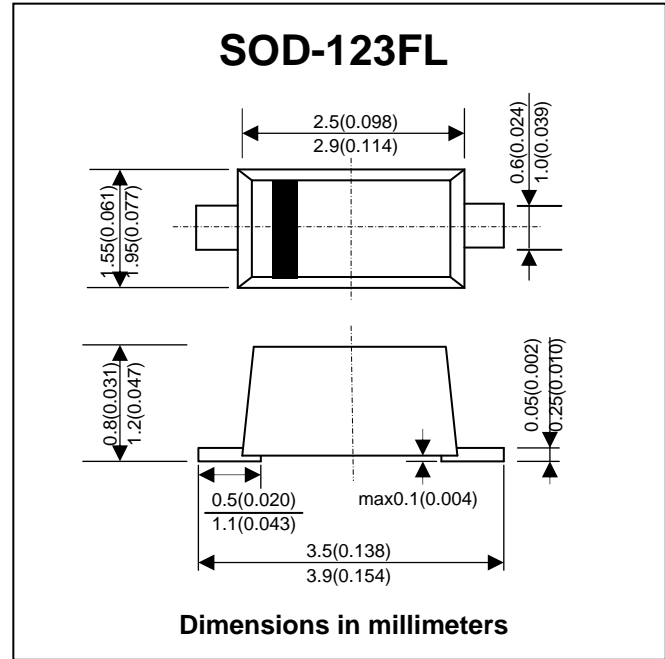

MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Rating at 25 °C ambient temperature unless otherwise specified. Single phase, half wave, 60 Hz, resistive or inductive load.
 For capacitive load, derate current by 20%.

RATING	SYMBOL	SMR1A	SMR1B	SMR1D	SMR1G	SMR1J	SMR1K	UNIT
Marking		RA	RB	RD	RG	RJ	RK	
Maximum Recurrent Peak Reverse Voltage	V _{RRM}	50	100	200	400	600	800	V
Maximum RMS Voltage	V _{RMS}	35	70	140	280	420	560	V
Maximum DC Blocking Voltage	V _{DC}	50	100	200	400	600	800	V
Maximum Average Forward Current Ta = 55 °C	I _{F(AV)}	1.0						A
Peak Forward Surge Current, 8.3ms Single half sine wave Superimposed on rated load (JEDEC Method)	I _{FSM}	25						A
Maximum Peak Forward Voltage at I _F = 1.0 A	V _F	1.4						V
Maximum DC Reverse Current Ta = 25 °C at Rated DC Blocking Voltage Ta = 100 °C	I _R	5						μA
	I _{R(H)}	50						μA
Maximum Reverse Recovery Time (Note 1)	T _{rr}	150				250	500	ns
Typical Junction Capacitance (Note 2)	C _J	50						pF
Junction Temperature Range	T _J	- 65 to + 150						°C
Storage Temperature Range	T _{STG}	- 65 to + 150						°C

Notes :

- (1) Reverse Recovery Test Conditions : I_F = 0.5 A, I_R = 1.0 A, I_{rr} = 0.25 A.
- (2) Measured at 1.0 MHz and applied reverse voltage of 4.0 Vdc

RATING AND CHARACTERISTIC CURVES (SMR1A - SMR1K)

FIG.1 - REVERSE RECOVERY TIME CHARACTERISTIC AND TEST CIRCUIT DIAGRAM

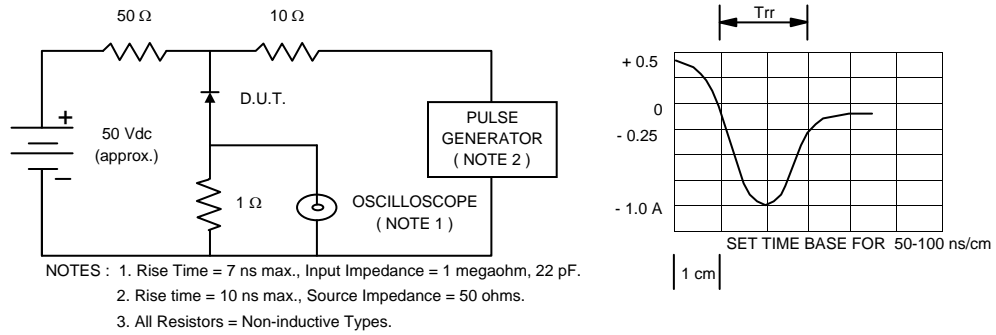


FIG.2 - DERATING CURVE CURRENT

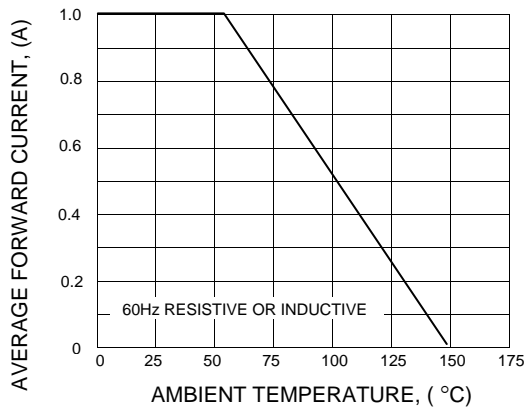


FIG.3 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT

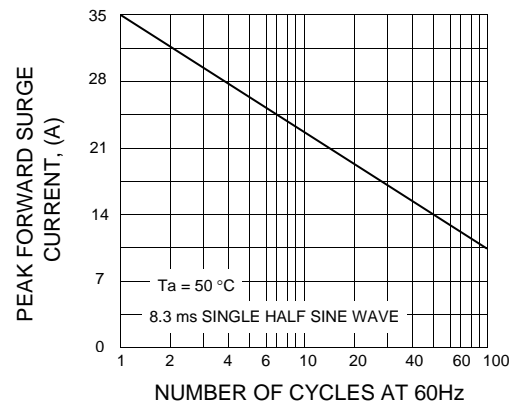


FIG.4 - TYPICAL FORWARD CHARACTERISTICS

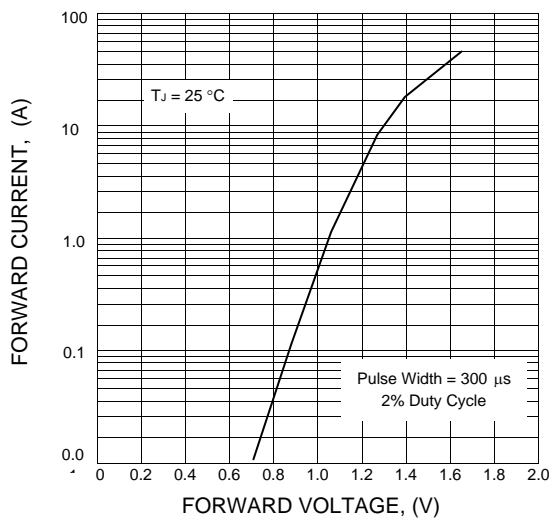


FIG.5 - TYPICAL REVERSE CHARACTERISTICS

